


Bankside Guard Seat

Circular tree bench

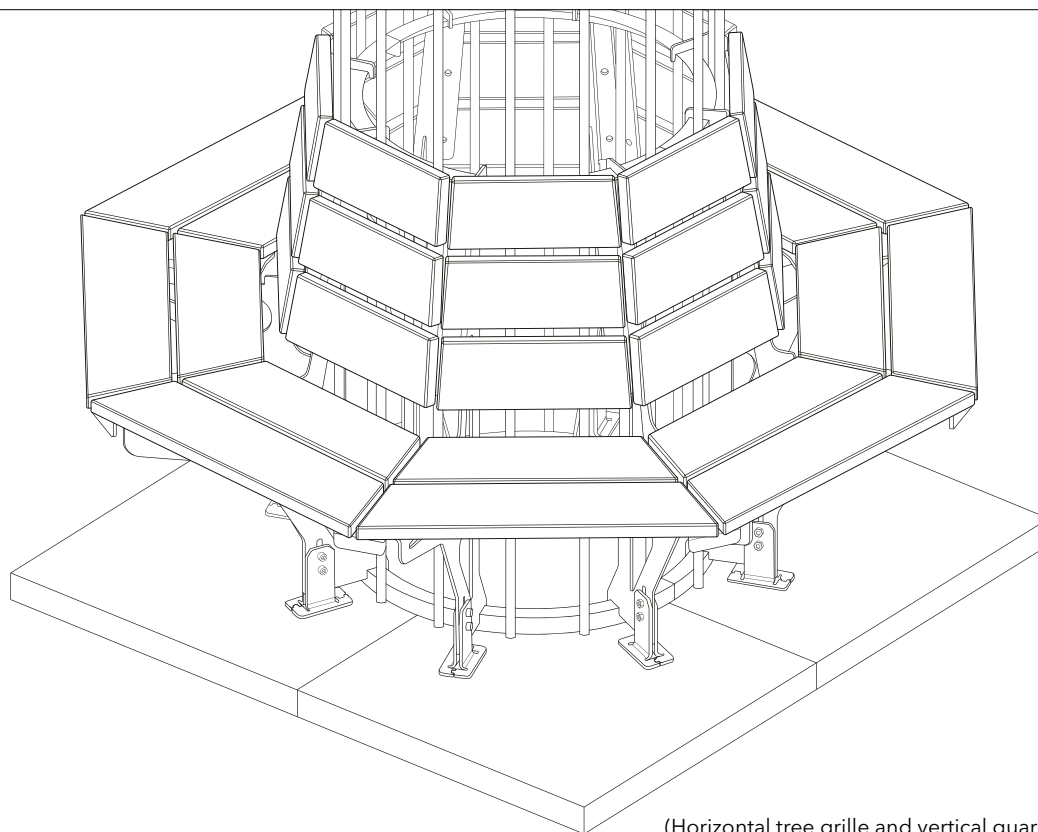

(Horizontal tree grille and vertical guard not included)

Overview

GreenBlue Urban's new Bankside Guard Seat is a fantastic compliment to the enduring range of GBU vertical tree guards such as the Ullswater. Designed to be suitable for retro fitting to existing tree guards as well as for new projects, it fits flawlessly into the streetscape providing a perfect relaxation spot beneath a tree.


FSC Iroko hardwood brings out the attractiveness and durability of natural sustainable materials. Structural frames engineered from steel and given robust powder coat protection treatments, and extra-large stainless-steel fixings ensure this bench will endure in the harshest environments.

Features

- Heavy duty powder coated steel frame sections
- FSC Iroko seat facings
- Stainless steel fixings included
- Suitable for GBU's 600mm diameter 'Lakes' range of vertical steel tree guards

Benefits

- Environmentally friendly fully FSC certified sustainable timber
- Natural Iroko finish weathers to a beautiful silver-grey
- Simple to retro fit to existing GBU tree guard installations
- Ergonomically comfortable design

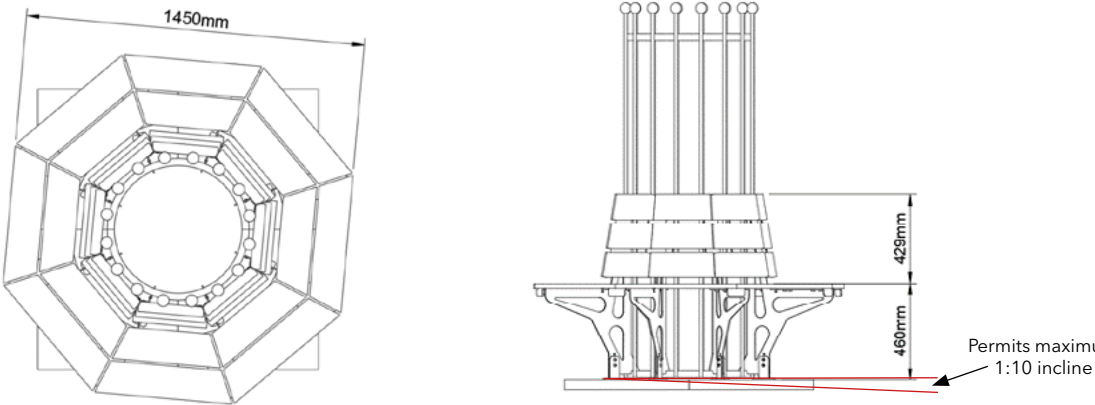	Code	Dimensions	Suitable for:
Product code	GBUBGS18A	W 1450mm x H 890mm	GBU 'Lakes' range of vertical steel tree guards, except the 'Derwent' All GBU tree grilles with 600mm diameter round central apertures
Dimensions	 <p>(Horizontal tree grille and vertical guard not included)</p>		
Powder Coat Finish	<p>Specially developed 3-stage double-coat powder coat finishing process.</p> <p>Tested to Artificial Weathering ISO 11341, Natural Weathering ISO 2810 Conforms to Corrosiveness Category C5-Industry / C5-Martime - Durability Range of 'High' Exp. lifespan >15yrs Conforms to ISO 12944-6 - IM3 - soil and the Durability Range of 'High' Exp. lifespan >15yrs Resistance to Humidity: 720 hours according to ISO 6270 Kesternich Test: 30 cycles according to ISO 3231 Adhesion Test: 0 according to ISO 2409 Bucholz Indentation Test: ≥ 87 according to ISO 2815 Porosity Density Test: 'non-porous' according to DIN 55 670</p> <p>Specific slip resistance report available to order</p> <p>Standard colour RAL 9005 Matt Black Full range of RAL colours available to order</p>		
Timber	FSC Certified Iroko		
Accessories	Available to order Fixings pack Replacement timber seat facings		
Maintenance	Biannual Inspection Assess physical / cosmetic damage, spray protect exposed metal Replace missing fixings or seat facings		