


# FTS Medway Tree Grille

Fully integrated fabricated tree grille systems.

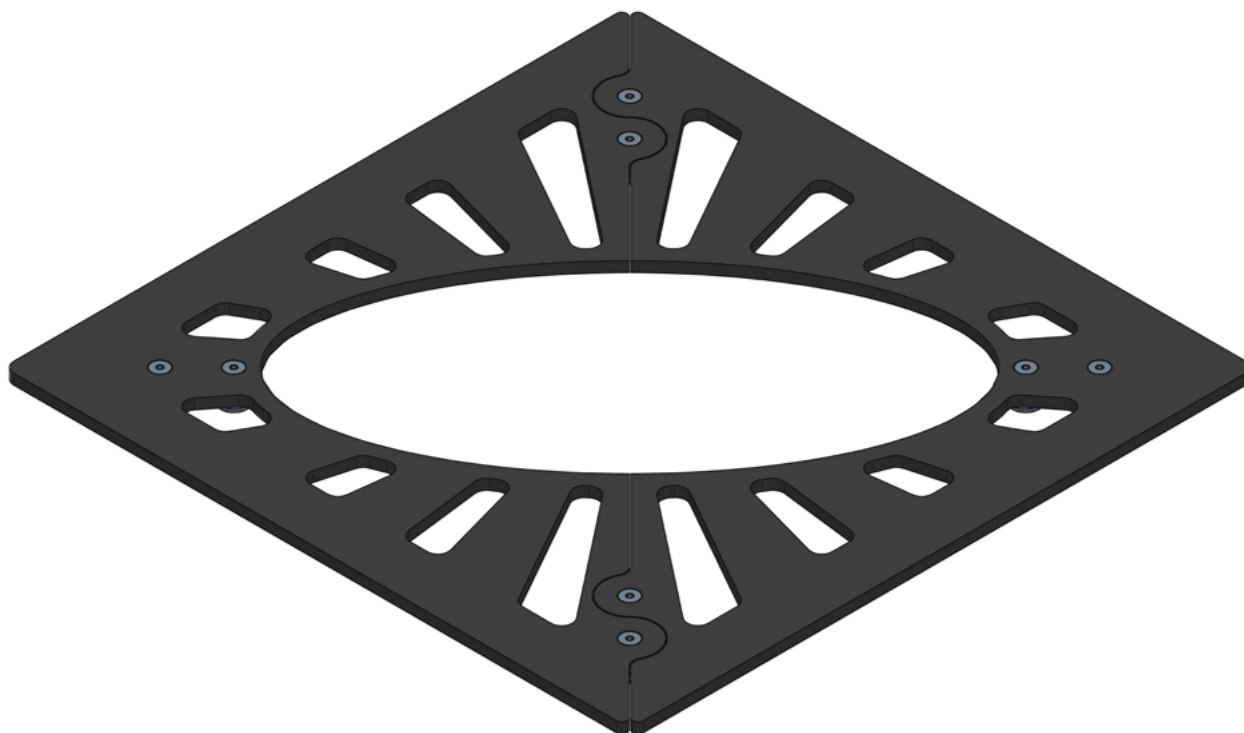

## Overview


Our unique Medway grille is 600mm square designed to fit within the space of a single paving slab. This is for small species low budget tree pits where full tree maturity is not required. RD510 root directors and Metro irrigation systems are supplied complete with the Medway tree grille to create a full low soil volume tree pit system. Steel support frames and are available separately where increased vertical load bearing capacity is required.

## Features

- Oval centre allows insertion of tree stakes
- Very strong laser cut powder coated steel
- Supplied with RD510A RootDirector
- Supplied with Metro Irrigation System

## Benefits

- Enables tree grille to be placed within a single paving slab
- Quick and easy installation
- Vandal resistant construction
- Low budget option
- Prevents soil compaction around tree root ball

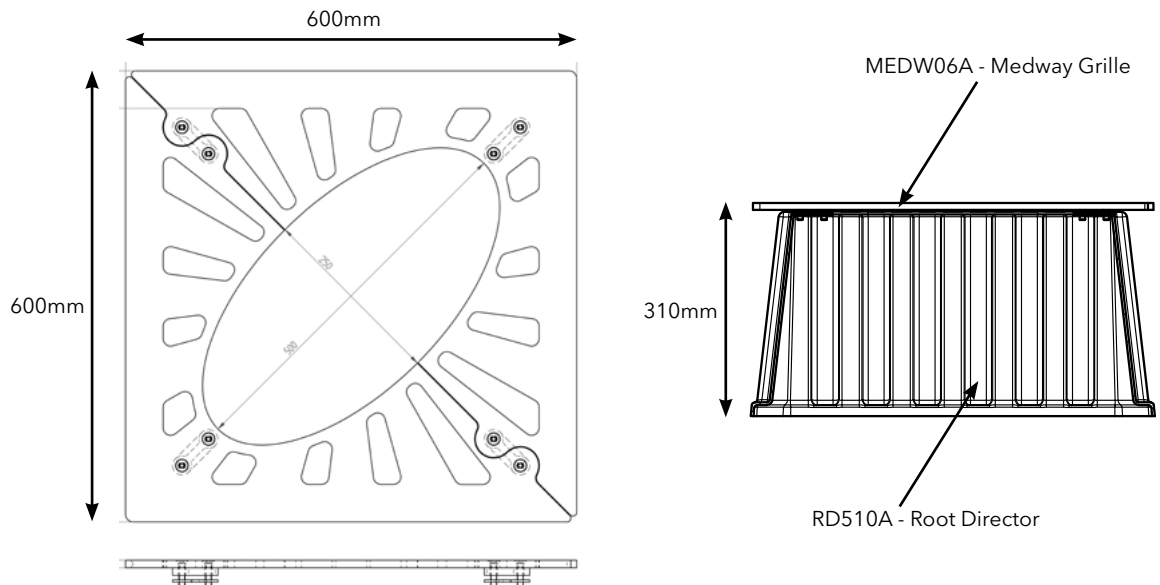	Code	Size	Description
<b>Product codes</b>	MEDW06A	600mm	Medway laser cut steel tree grille. C/W RootRain Metro Irrigation & RD510 RootDirector.
<b>Dimensions</b>			
<b>Overrun Capacity</b>	Suitable for pedestrian traffic		
<b>Power Coat Finish</b>	<p>Specially developed 3-stage double-coat powder coat finishing process.</p> <p>Tested to Artificial Weathering ISO 11341, Natural Weathering ISO 2810          Conforms to Corrosiveness Category C5-Industry / C5-Martime - Durability Range of 'High' Exp. lifespan &gt;15yrs          Conforms to ISO 12944-6 - IM3 - soil and the Durability Range of 'High' Exp. lifespan &gt;15yrs          Resistance to Humidity: 720 hours according to ISO 6270          Kesternich Test: 30 cycles according to ISO 3231          Adhesion Test: 0 according to ISO 2409          Bucholz Indentation Test: <math>\geq 87</math> according to ISO 2815          Porosity Density Test: 'non-porous' according to DIN 55 670</p> <p>Specific slip resistance report available to order</p> <p>Standard colour RAL 9005 Matt Black <a href="#">Full range of RAL colours available to order</a></p>		
<b>Accessories</b>	Spare fixing kit		
<b>Material</b>	Standard: Mild galvanised steel Bespoke optional: Stainless Steel grade 304, Stainless Steel grade 316, Corten Weathering Steel		
<b>Maintenance</b>	<b>Annual Inspection:</b> Visual periodic inspection/cleaning of Metro irrigation inlets		